




ecoSep™ - 20 L/S - STANDARD
- SPILL CONTROL / COALESCING CHAMBER

OIL RECIPIENT
CAPACITY = 253± LITRES

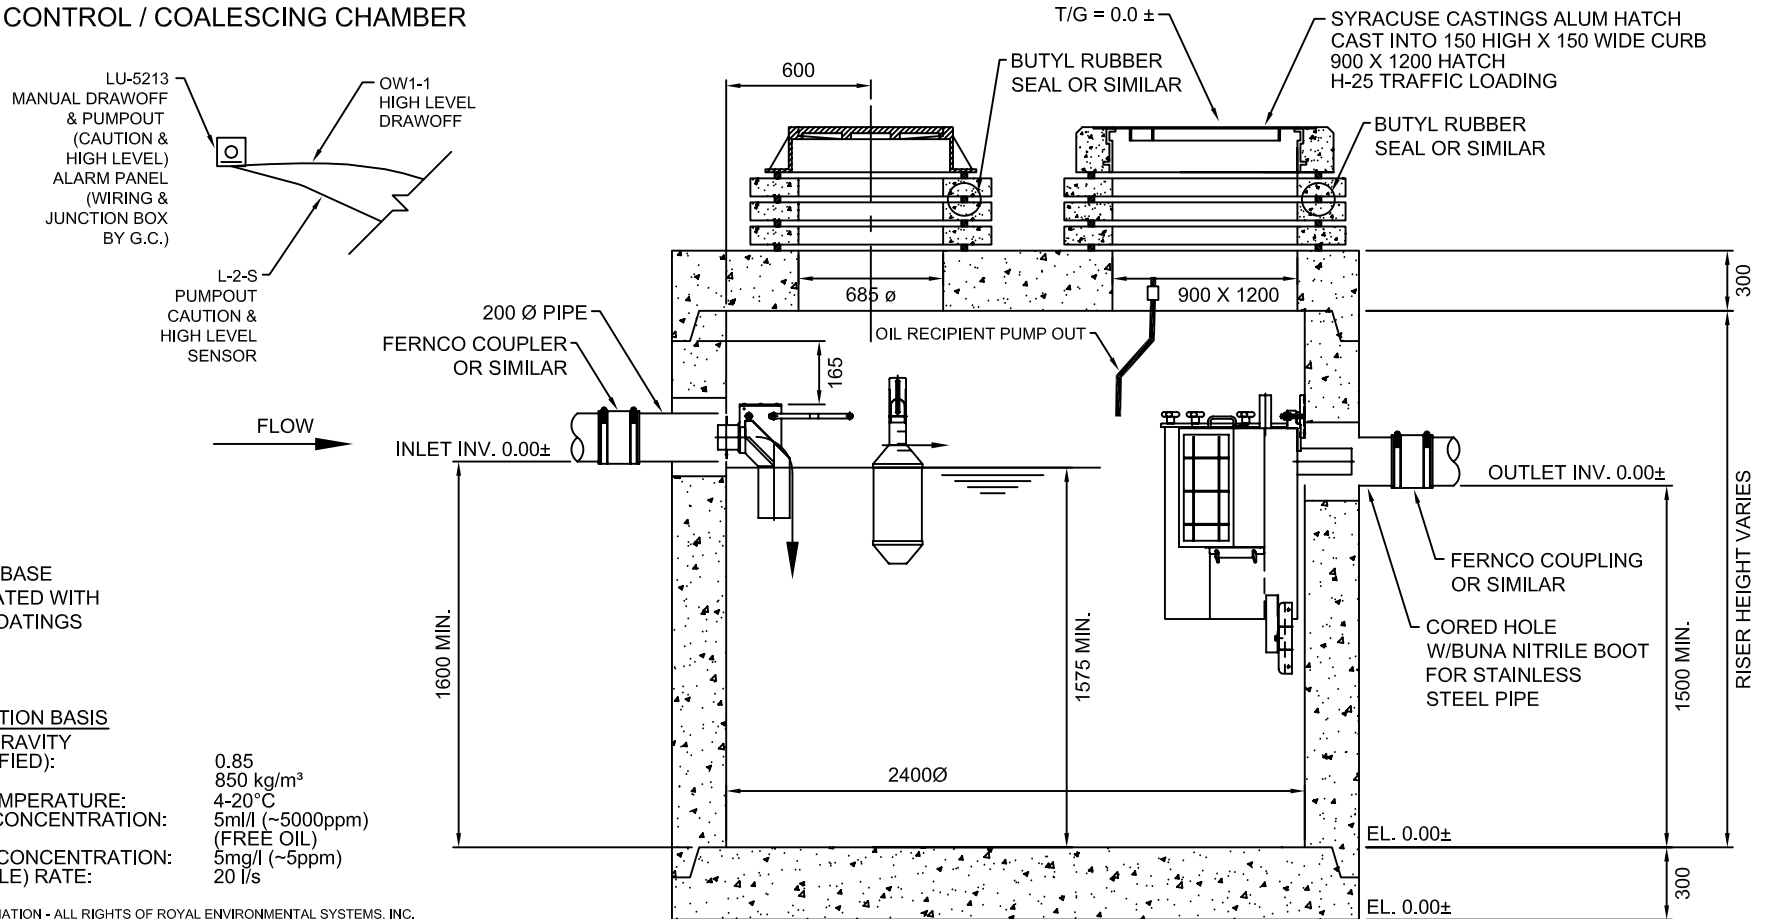

NOTE:
INTERIOR OF BASE
SECTION COATED WITH
RESISTALL COATINGS
OR SIMILAR.

DESIGN INFORMATION BASIS

OIL SPECIFIC GRAVITY
(NON-EMULSIFIED): 0.85
850 kg/m³
OPERATING TEMPERATURE: 4-20°C
INFLUENT OIL CONCENTRATION: 5ml/l (~5000ppm)
(FREE OIL)
EFFLUENT OIL CONCENTRATION: 5mg/l (~5ppm)
FLOW (NOMINALE) RATE: 20 l/s

PROPRIETARY INFORMATION - ALL RIGHTS OF ROYAL ENVIRONMENTAL SYSTEMS, INC.

REINFORCING TO CSA G.30.18 GRADE 400W
ALL DIMENSIONS ARE IN mm
DRAWING DETAIL NOT TO BE SCALED

MIN. CONC STRENGTH, XX MPa
CLEAR COVER = XX mm ± XX mm
AIR ENTRAINMENT 4.50 % TO 8.00%
STRIP CONC. STRENGTH XX MPa
TOLERANCES TO CSA A23.4-05 : 12.2

W.O.	JOB No.	PART
		XX0000

CUST.	PROJ.

TITLE

**STANDARD ECOSEP 20 L/S
SPILL CONTROL/ COALESCING CHAMBER**

BY	DATE	FILE
EPS	22 / MAY / 07	esep_res_20_pc.DWG

REV.	DESCRIPTION	ENG.	DATE

EMAIL: SALES@CONCASTPIPE.COM



CON CAST PIPE RR 3 Guelph, ON N1H 6H9

Fax: (519) 763-1956

1-800-668-7473

www.concastpipe.com